REMO-TEL™ COMPOST QUICK START GUIDE

TEL-TRU® TEMPERATURE SOLUTIONS

Customer Focused Since 1916.

WHAT'S IN THE BOX

Remo-Tel Unit
with Protective Probe Cap

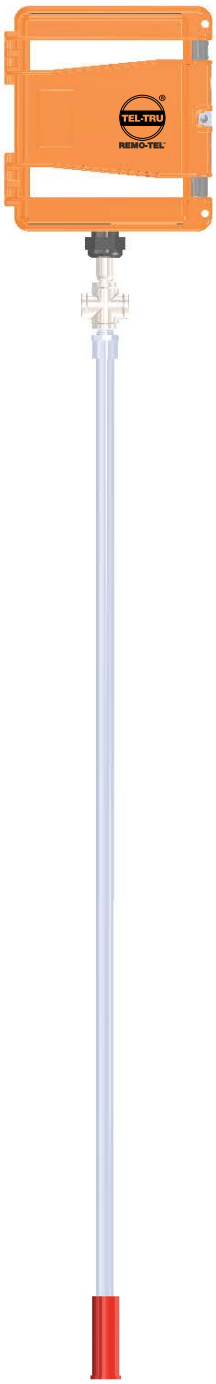

2 Removable Handles

2 Rechargeable Batteries

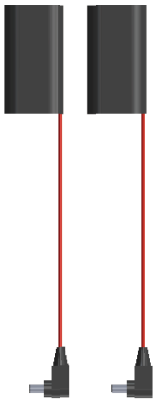

1 Charger (110v)

TEL-TRU® TEMPERATURE SOLUTIONS

www.teltru.com

REMO-TEL® COMPOST QUICK-START GUIDE

INSTRUCTIONS

STEP 1: Create (or log into) your account and organization and register your device.
You will not be able to go beyond this point without creating an account. Go to www.teltru.com/remotel. Detailed registration information can be found within the Instruction Manual.

STEP 2: Charge Battery
Charge one battery pack fully before first use (an extra battery is included to prevent downtime). The LED indicator light on the charger will be red while charging and will turn green when fully charged.

STEP 3: Assembly
Open the orange enclosure case by lifting the black latches. Place a fully charged battery inside the secure pouch and plug into the power jack (Figure 1). Install the (2) handles by threading them onto the cross-shaped fitting just below the enclosure (Figure 2).

STEP 4: Power On
Power on the device by pressing the power button once and releasing when the LED lights up (Figure 3). The LED will turn to flashing blue when the device has completed its start up sequence. Close the case and latch the enclosure shut before use.

Basic LED status chart

Flashing Yellow	Unit is initializing
Flashing Green	Unit connected with cell tower and is registering with the server
Solid Blue	Unit is normally operating and actively monitoring the environment
Solid Red	No cellular reception, try a different location

STEP 5: Install
Carefully remove the red protective cap from probe tip, and save for later when storing the device. Utilize the handles to push the entire probe into the center of a compost pile (Figure 4).

Warning probe tip is very sharp.
Do not push on the head of the device. Only push down on the handles to install.
Do not force the probe through hard objects during insertion. Pull the probe out of the pile and try again in another area.

STEP 6: Read data
You will see the first set of temperature readings on the Remo-Tel Monitoring Dashboard (www.teltru.com/remotel) within one minute.

NOTE: Please allow 60 minutes for the sensors to acclimate to the environment before expecting normal operation.

You can download the historical data by clicking "Export to CSV".

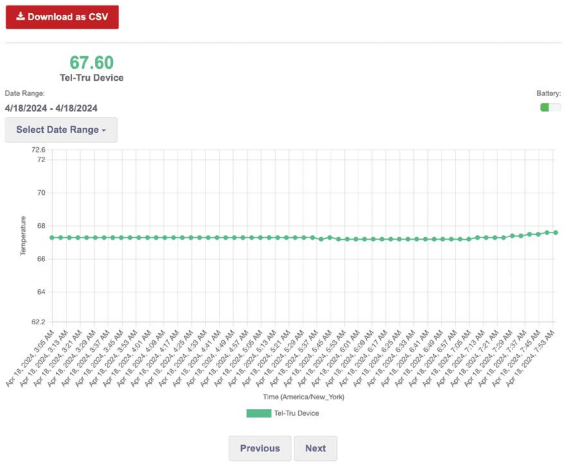

Figure 1

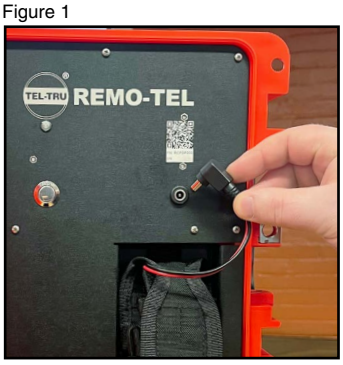

Figure 2

Figure 3

Figure 4

For the full user manual and detailed LED statuses go to the Remo-Tel® page on our website.

TEL-TRU® TEMPERATURE SOLUTIONS

SHOP ONLINE
www.teltru.com

Phone: (585) 232-1440
(800) 232-5335
408 St. Paul Street, Rochester, NY 14605 USA

CERTIFIED ISO 9001:2015 COMPANY

PROUDLY MADE IN THE USA

RCPG2408